

Wide Band Notch Filter - 6IN40-897.5/X265-O/O

◆ Features:

- Wide Band Notch Filter
- Chebyshev and Elliptic Response
- Small Sizes and Custom Packages
- Configurations Include Surface Mount, Cables, or Connectors




◆ Specifications:


Mechanical:	SMA Female Connectors (1.5 x 0.5 x 0.4)
VSWR:	<1.5:1 @ 500 - 765 MHz <1.5:1 @ 1030 - 3500 MHz
Stopband:	25 dB @ 824 - 960 MHz
Insertion Loss:	<1.0 dB @ 500 - 765 MHz <1.0 dB @ 1030 - 3500 MHz

◆ Applications:

- Broad Band Communications
- Fixed Mobile

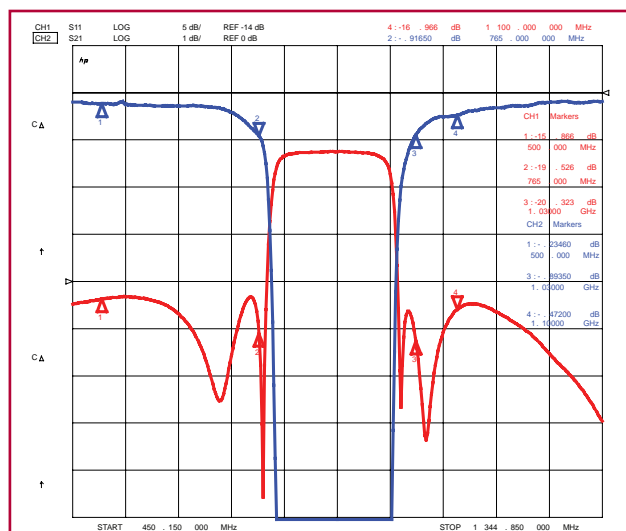

Insertion Loss/Return Loss

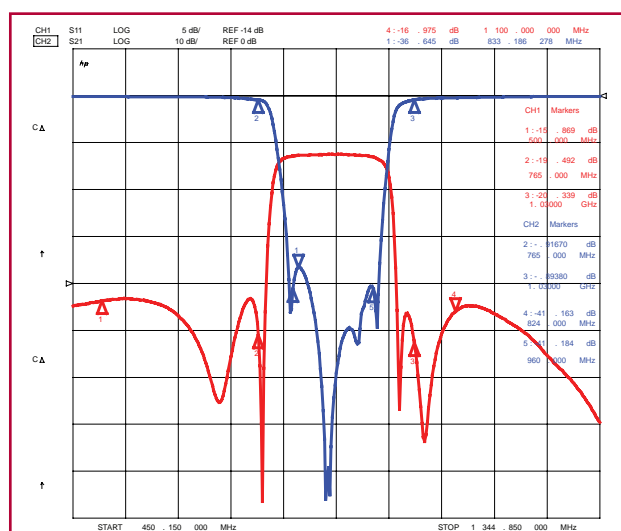

Rejection /Return Loss



Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 443-260-2268
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1904-567355
 FAX: +44-(0)-1904-675521
 Email: sales@kleurope.com

www.klfilterwizard.com & www.klmicrowave.com