


2 GHz Suspended Substrate Lowpass Filter

◆ Features:

- Lowpass Filter
- Low Insertion Loss
- 1.5:1 VSWR @ DC to 2,000 MHz
- Environmental Friendly Package
- SMA Connectors

◆ Specifications:

Insertion loss:	<1 dB @ DC to 2,000 MHz
Outline Dimensions:	2" x 1.5" x .5"
Environmental Specs:	
Shock:	20G's, 1/2 sine, 11 Ms
Vibration:	10 G's, 10-2,000 Hz
Temperature:	-55 to +85 Degrees C
Relative Humidity:	0-95%
VSWR:	1.5:1 @ DC to 2,000 MHz >50 dB @ 2,300 MHz stopbands

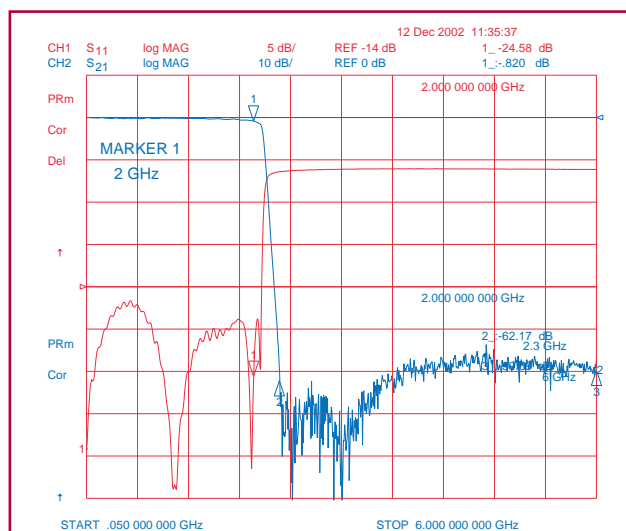

Amplitude Response

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com



A DOVER COMPANY